

Electric Platform Truck




Model:
BD25
BD20
BD30



1KG=2.205LB 1INCH=25.40MM

General Information	1.2	Manufacturer's type designation	BD25	BD20	BD30	
	1.3	Drive: electric,diesel, petrol, fuel gas	Electric	Electric	Electric	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker	Seated	Seated	Seated	
	1.5	Rated capacity/rated load	Q (kg)	2500	2000	3000
Weight	1.9	Wheelbase	y (mm)	1500	1500	1850
	2.1	Service weight	kg	1300	1185	1750
	2.2	Axle loading, laden front/rear	kg	975/2825	815/2370	1660/3090
	2.3	Axle loading, unladen front/rear	kg	590/710	540/645	865/885
Tyres	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	Solid rubber	Solid rubber	Pneumatic	
	3.2	Tyre size, front	406×127×266.7	406x127x266.7	6.00-9-10Pr	
	3.3	Tyre size, rear	457×127×308	457x127x308	6.50-10-12 Pr	
	3.5	Wheels, number front/rear (× = driven wheels)	2x+2	2x+2	2x+2	
Dimensions	3.6	Tread, front	b10 (mm)	935	935	935
	3.7	Tread, rear	b11 (mm)	925	925	925
	4.8	Seat height relating to SIP/stand height	h7 (mm)	770	770	820
	4.19	Overall length	l1 (mm)	3150	3150	3440
Performance Data	4.21	Overall width	b1/b2 (mm)	1100	1100	1100
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	90	90	120
	4.35	Turning radius	Wa (mm)	3000	3000	4200
	5.1	Travel speed, laden/unladen	km/h	9/12	9/12	11/13
Motors	5.8	Max. gradeability, laden/unladen	%	10/20	10/20	10/20
	5.10	Service brake	Hydraulic	Hydraulic	Hydraulic	Hydraulic
	6.1	Drive motor rating S2 60 min	kW	3.0(DC)	3.0(DC)	5.0(DC)
	6.4	Battery voltage/nominal capacity K5	(V)/(Ah) or kWh	48/250	48/200	48/330
Additional Data	6.5	Battery weight	kg	430	315	662
	10.7	Sound pressure level at the driver's seat	dB (A)	75	75	75

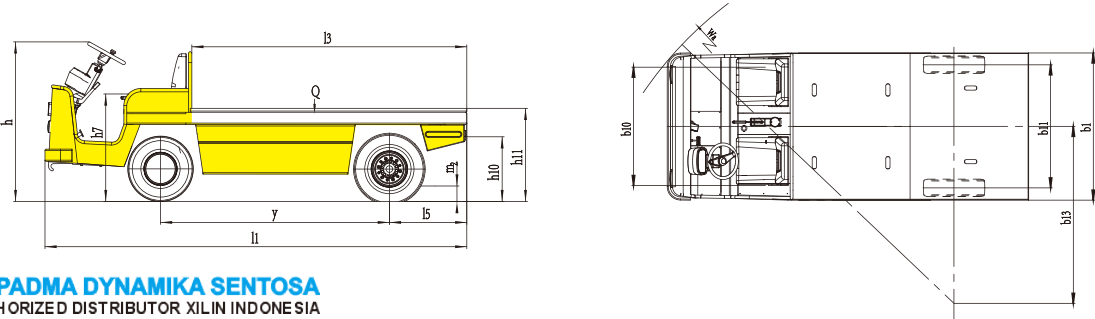

Model:
BD10S/20SE

Remark: Special size can be made according to customer's requirement.



BD20SE
Optional rearview mirror

1KG=2.205LB 1INCH=25.40MM

General Information	1.2	Manufacturer's type designation		BD10S	BD20SE	
	1.3	Drive: electric,diesel, petrol, fuel gas		Electric	Electric	
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated	Seated	
	1.5	Rated capacity/rated load	Q (kg)	1000	2000	
Weight	1.9	Wheelbase	y (mm)	1600	1470	
	2.1	Service weight	kg	980	820	
	2.3	Axle loading, unladen front/rear	kg	400/420		
Tyres	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		Solid rubber	Solid rubber	
	3.2	Tyre size, front		15x4 ½-8	15x4 ½-8	
	3.3	Tyre size, rear		15x4 ½-8	15x4 ½-8	
	3.5	Wheels, number front/rear (× = driven wheels)		2x+1	2x+1	
	3.7	Tread, rear	b11 (mm)	860	860	
Dimensions	4.8	Seat height relating to SIP/stand height		h7 (mm)	835	940
	4.19	Overall length		l1 (mm)	2485	2410
	4.21	Overall width		b1/b2 (mm)	1000	1000
	4.32	Ground clearance, centre of wheelbase		m2 (mm)	100	80
	4.35	Turning radius		Wa (mm)	1998	1865
Performance Data	5.1	Travel speed, laden/unladen		km/h	12/13	6.5/11
	5.8	Max. gradeability, laden/unladen		%	12/15	7/15
	5.10	Service brake		Hydraulic	Hydraulic	
Motors	6.1	Drive motor rating S2 60 min		kW	3.0	3.0
	6.4	Battery voltage/nominal capacity K5		(V)/(Ah) or kWh	48/240	36/250
	6.5	Battery weight		kg	350	202
Additional Data	10.7	Sound pressure level at the driver's seat		dB (A)	70	70

