

Hand Pallet Truck



Model: BF-III

1KG=2.205LB 1INCH=25.40MM

Model	BF-III		
Capacity	Q(kg)	2500/3000	2500/3000
Lowered fork height	h ₁ (mm)	85	75
Steering wheel	mm	Φ180	Φ180
Fork wheel single	mm	Φ74x93	Φ74x93
Fork wheel double	mm	Φ74x70	Φ74x70
Max. Lifting height	h ₂ (mm)	195	185
Height of tiller in drive position min./max.	h ₃ (mm)	1214	1214
Overall length	L ₁ (mm)	1543/1613	1543/1613
Fork length	L ₂ (mm)	1150/1220	1150/1220
Width overall forks	b ₁ (mm)	520/550/685	520/550/685
Ground clearance, center of wheelbase	m ₁ (mm)	32	22
Aisle width for pallets 1000x1200 crossways	A ₁ (mm)	1743/1813	1743/1813
Aisle width for pallets 800x1200 lengthways	A ₂ (mm)	1793/1813	1793/1813
Turning radius	W ₁ (mm)	1276/1346	1276/1346
Service weight	kg	56-70	56-70

Remark: Special size fork width and length can be made according to customer's requirement.

Hot Sale





Premium

Hand pallet truck

- Integrated pump without welding , no any leaking problems.
- Frame force is more reasonable , and the strength is more reliable.
- Handle seat has hole it is more convenient for installation of control chain.
- Forks lowering speed is controllable, with overload valve to avoid overloading .
- Option: 1) steering wheel 200mm (fork wheel 80mm) are available.
2) Nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.
3) Fork length: 800mm, 900mm, 1000mm, 1100mm.
4) Foot pedal release.
5) Pump color: black painting.
6) Quick lift (double speed lifting).



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

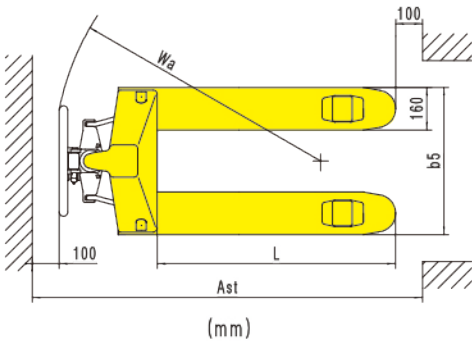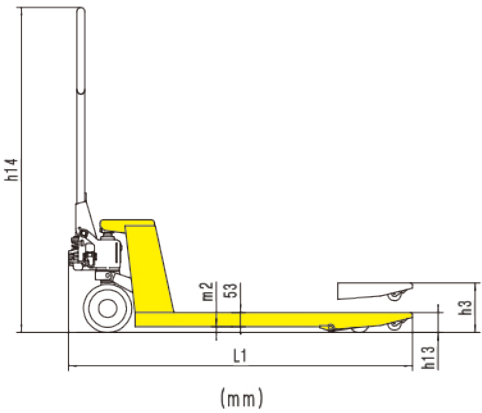

Wheel Option



Nylon wheel



Rubber wheel



PU wheel



PU wheel

Handle Option



*Standard: metal handle



*Option: rubber wrapped handle



Standard with entry & exist Roller
(option with single or double fork rollers)



Integrated cast pump

Electric Pallet Truck

Electric Stacker

Order Picker

Narrow Aisle Truck

Electric Tow Tractor

Hand Pallet Truck

Manual Stacker

Lift Table