

Semi-electric Stacker




Hot Sale

Model:
CDD10B-III
CDD15B-III

Overall forks
Adjustable forks

Super Light




CDDB-III
Adjustable Forks



		Overall forks		Adjustable forks	
General Information	1.2 Manufacturer's type designation	CDD10B-III	CDD15B-III	CDD10B-III	CDD15B-III
	1.3 Drive: electric (battery type, mains, ...), diesel, petrol, fuel gas	Electric	Electric	Electric	Electric
1.4 Operator type: hand, pedestrian, standing, seated, order-picker		Pedestrian	Pedestrian	Pedestrian	Pedestrian
1.5 Rated capacity/rated load	Q (kg)	1000	1500	1000	1500
1.6 Load centre distance	c (mm)	500	500	500	500
1.8 Load distance, centre of drive axle to fork	x (mm)	710	710	654	636
1.9 Wheelbase	y (mm)	1185	1265	1185	1265
Weight	2.1 Service weight	355/410/445/475/495	405/475/480/530/550	385/440/475/505/525	435/510/535/560/580
	2.2 Axle loading, laden front/rear	kg	520/890	540/900	661/1349
	2.3 Axle loading, unladen front/rear	kg	325/85	370/105	345/95
Tyres	3.1 Tyres: solid rubber, superelastic, pneumatic, polyurethane		NYLON	NYLON	NYLON
	3.2 Tyre size, front		Φ180x50		Φ180x50
	3.3 Tyre size, rear		Φ80x70		Φ80x70
	3.5 Wheels, number front/rear (× = driven wheels)		2/2		2/2
	3.6 Tread, front	b10 (mm)	700		700
	3.7 Tread, rear	b11 (mm)	410/510		410(510)
	3.8 Tread, rear	b12 (mm)	410/510		410(510)
Dimensions	4.2 Height, mast lowered	h1 (mm)	2090/1840/2090/2240/2340	2090/1840/2090/2240/2340	
	4.4 Max. lift height	h3 (mm)	1600/2500/3000/3300/3500	1600/2500/3000/3300/3500	
	4.5 Height, mast extended	h4 (mm)	2090/3060/3560/3860/4060	2090/3060/3560/3860/4060	
	4.10 Height of wheel arms	h8 (mm)	81		81
	4.15 Height, lowered	h13 (mm)	90		90
	4.19 Overall length	l1 (mm)	1678	1740	1735
	4.20 Length to face of forks	l2 (mm)	475	555	531
	4.21 Overall width	b1/b2 (mm)	800	800	967
	4.22 Fork dimensions DIN ISO 2331	s / e / l (mm)	60/170/1070	60/170/1070	60/142/1070
	4.25 Fork spread	b5 (mm)	570/695	570/695	295-930
	4.32 Ground clearance, centre of wheelbase	m2 (mm)	21	21	21
	4.34.1 Aisle width for pallets 1000 × 1200 crossways	Ast (mm)	2291	2371	2315
Performance Data	4.34.2 Aisle width for pallets 800 × 1200 lengthways	Ast (mm)	2257	2337	2300
	4.35 Turning radius	Wa (mm)	1425	1505	1425
	5.2 Lift speed, laden/unladen	m/s	0.07/0.10	0.07/0.10	0.07/0.10
	5.3 Lowering speed, laden/unladen	m/s	0.15/0.12	0.12/0.15	0.15/0.12
Motors	5.10 Service brake		Mechanical brake	Mechanical brake	Mechanical brake
	6.2 Lift motor rating at S3 15%	kW	1.6	2	1.6
	6.4 Battery voltage/nominal capacity K5	(V)/(Ah) or kWh	12/120	12/120	12/120
Additional Data	6.5 Battery weight	kg	45	90	45
	10.7 Sound pressure level at the driver's seat	dB (A)	70	70	70

Option of battery for CDD15B-III: 24V/120Ah

Conforms to EN ISO3691-1
EN1175
EN16307-1
Based on Directive 2006/42/EC

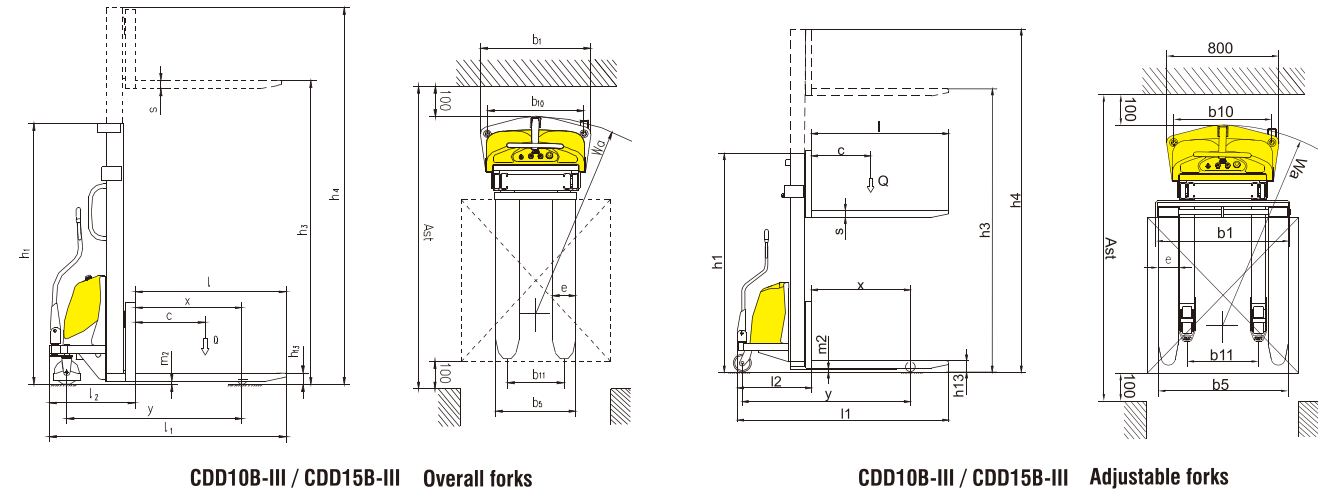

Electric Pallet Truck

Electric Stacker

Order Picker

Narrow Aisle Truck

Electric Tow Tractor

Hand Pallet Truck

Manual Stacker

Lift Table