

Model: DB

1KG=2.205LB 1INCH=25.40MM

Model		DB
Capacity	Q(kg)	2000
Lowered fork height	h ₁₃ (mm)	75
Steering wheel	mm	Φ160
Fork wheel single	mm	Φ70x80
Fork wheel tandem	mm	Φ70x60
Max. lift height	h ₂ (mm)	190
Total height	h ₁₄ (mm)	1176.5
Overall length	l ₁ (mm)	1520/1590
Fork length	l (mm)	1150/1220
Width overall forks	b ₅ (mm)	520/550/680
Ground clearance, centre of wheelbase	m ₂ (mm)	22
Aisle width for pallets 1000x1200 crossways	A _w (mm)	1720/1790
Aisle width for pallets 800x1200 lengthways	A _w (mm)	1770/1790
Turning radius	W _t (mm)	1265/1335
Service weight	kg	53-62


Remark: Special size fork width and length can be made according to customer's requirement.



Standard



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

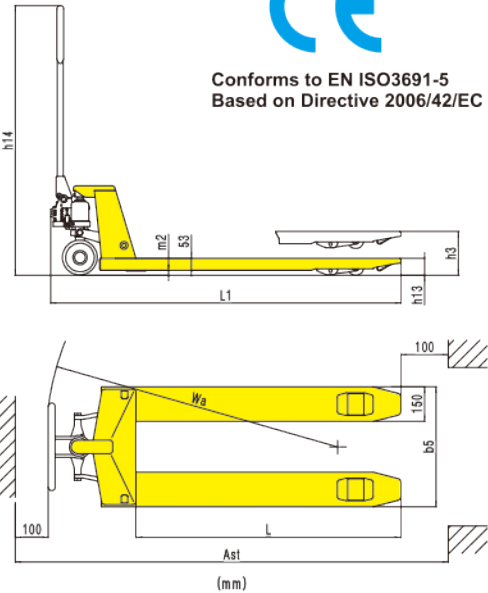

Economic design pallet truck

- Standard epoxy powder coat finish which is resistant to chips and normal corrosion.
- Exceptionally strong but light weight steel construction, service weight is only 55kgs.
- With welded joints and reinforced fork tips for most durability in the toughest applications.
- 3 position hand control - Raise, Lower, Neutral.
- Excellent turning angle of 190 degrees facilities.
- Number of pump strokes 12 times, lift height per stroke 11mm.
- Reliable oil leak-proof hydraulic system.
- Option: 1) Nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.
2) Fork length: 800mm, 900mm, 1000mm,1100mm.

Model: DF-III

1KG=2.205LB 1INCH=25.40MM

Model		DF-III
Capacity	Q(kg)	2500/3000 2500/3000
Lowered fork height	h ₁₃ (mm)	85 75
Steering wheel	mm	Φ180 Φ160
Fork wheel single	mm	Φ70x80 Φ70x80
Fork wheel tandem	mm	Φ70x60 Φ70x60
Max. lift height	h ₂ (mm)	200 190
Total height	h ₁₄ (mm)	1186.5 1176.5
Overall length	l ₁ (mm)	1520/1590 1520/1590
Fork length	l (mm)	1150/1220 1150/1220
Fork width	e(mm)	150 150
Width overall forks	b ₅ (mm)	520/550/680 520/550/680
Ground clearance, centre of wheelbase	m ₂ (mm)	32 22
Aisle width for pallets 1000x1200 crossways	A _w (mm)	1720/1790 1720/1790
Aisle width for pallets 800x1200 lengthways	A _w (mm)	1770/1790 1770/1790
Turning radius	W _t (mm)	1265/1335 1265/1335
Service weight	kg	55-65 55-65


Remark: (1) Capacity 2000kg available.
(2) Special size fork width and length can be made according to customer's requirement.



Standard
(Innovation)



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

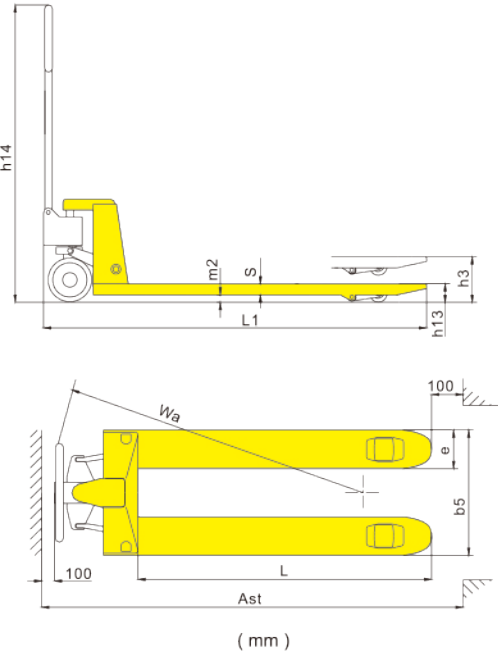

Standard type pallet truck

- Chrome piston and ram for smooth operation and prevents excessive wear on the pump & seal.
- Excellent turning angle of 180 degrees facilities.
- Number of pump strokes-10 times. Lift height per stroke:11mm.
- Option: 1) Nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.
2) Fork length: 800mm, 900mm, 1000mm.