


DPN-Lithium



Output Connector Option

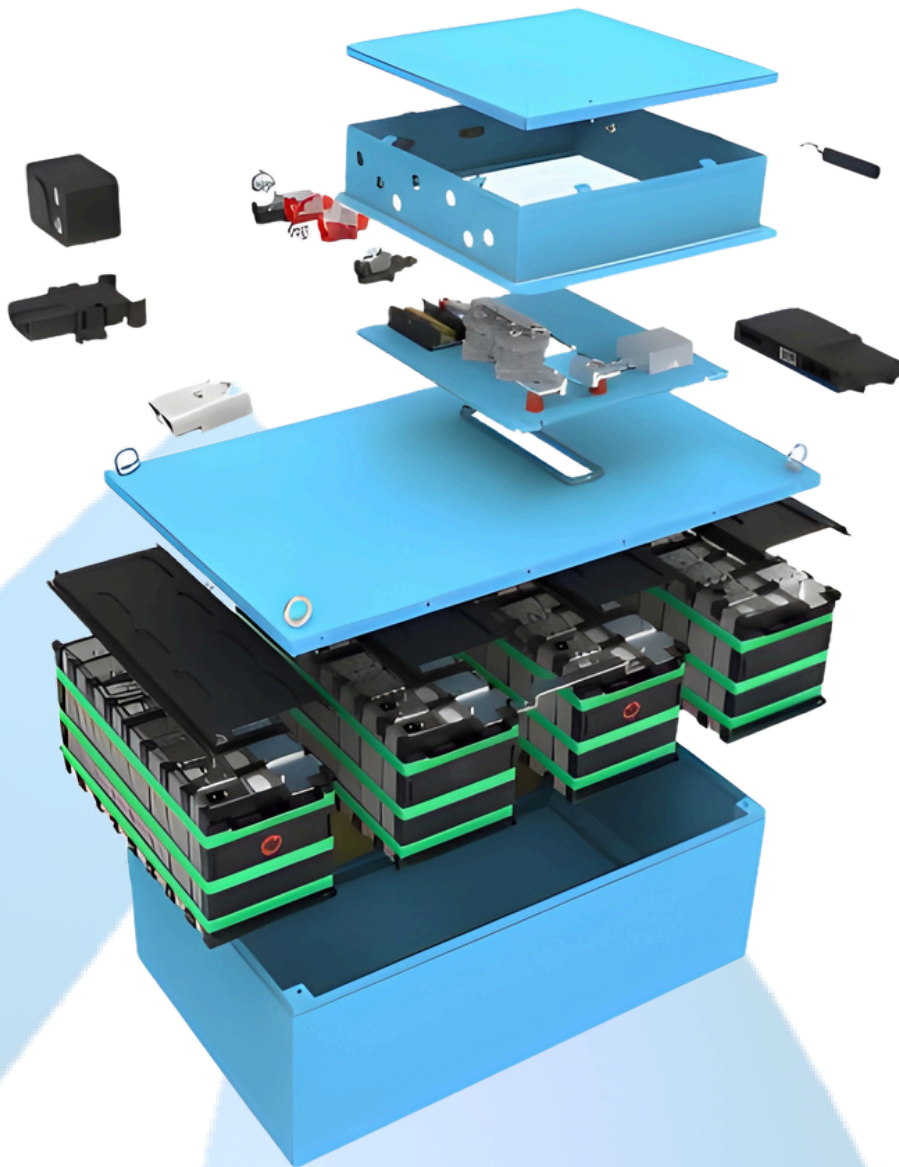

Anderson



Din



International
Charge Gun



Customized

Service

Ensuring Customer
Satisfaction



24 - Hour response

Remote service by intelligent
Cloud Platform

Battery maintenance training

On - site service option

51.2V Standard Pack

Item	Standard Pack I				Standard Pack II				Standard Pack III		Standard Pack IV	
Voltage	51.2V				51.2V				51.2V		51.2V	
Capacity	206 Ah	228 Ah	280 Ah	304 Ah	280 Ah	304 Ah	412 Ah	456 Ah	412Ah	456Ah	560Ah	608Ah
Weight	115 kg	117 kg	135 kg	137 kg	135 kg	137 kg	190 kg	195 kg	190kg	195kg	270kg	275kg
Dimension (L*W*H)	700*250*565mm				830*510*410mm				1034*250*644mm/ 1006*430*406mm		830*510*515mm/ 830*474*600mm	
Charge Connector	REMA DIN320A Female											
Discharge Connector	REMA DIN320A Female (replaceable)											
IP Grade	IP54											
Matched Charger with CAN	48V 150A or 48V200A											

80V Standard Pack

Item	Standard Pack I			Standard Pack II	
Voltage	80V			83.2V	
Capacity	304Ah	412Ah	456Ah	560Ah	608Ah
Weight	210kg	260kg	265kg	400kg	405kg
Dimension (L*W*H)	990*630*411mm			990*630*631mm	
Charge Connector	REMA DIN320A Female				
Discharge Connector	REMA DIN320A Female (replaceable)				
IP Grade	IP54				
Matched Charger with CAN	80V150A /80V200A				