


Manual Stacker with Adjustable Forks

Model:
SDJA-I
(1000~1500kg)



- With adjustable forks between 295/310mm to 930mm.
- Shaft type forks help to control adjustment better.
- High quality steel mast and strong steel construction ensures rigidity and durability.
- Welded forks deliver low-cost solution.
- High efficient pumps makes the control easier to operate.
- Foot and hand controlled lifting function allows the operator to work without having to perform extreme body movements.
- Metal grid protects user from lift chains.
- With safety wheel guard and brake system to ensure safety during operation.

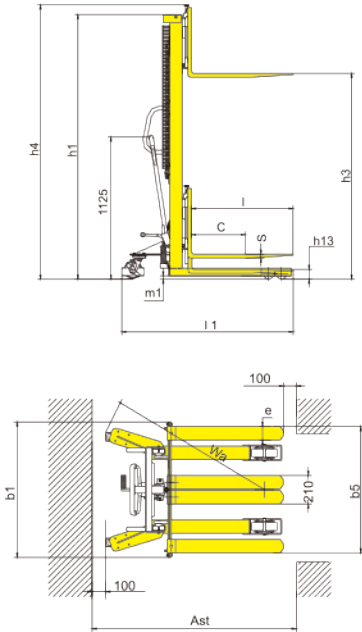

SDJA series with fixed legs and adjustable forks

1KG=2.205LB 1INCH=25.40MM


Model		SDJA1000- I	SDJA1500- I
Load capacity/rated load	Q(kg)	1000	1500
Load centre distance	c(mm)	500	500
Fork height, lowered	h_{10} (mm)	90	90
Height, mast lowered	h_1 (mm)	2080/1840	2085
Max. lift height	h_2 (mm)	1600/2500	1600
Height, mast extended	h_3 (mm)	2080/2960	2085
Overall length	l_1 (mm)	1650(1730)/1660(1740)	1660(1740)
Overall width	b_1 (mm)	967/886	967
Fork dimensions	s/e/l(mm)	60/142/1070(1150)	60/154/1070(1150)
Width overall forks	b_2 (mm)	295~930/295~850	310~930
Ground clearance, laden, below mast	m_1 (mm)	20	25
Aisle width for pallets 1000x1200 crossways	A_c (mm)	2048	2063
Aisle width for pallets 800x1200 lengthways	A_s (mm)	2030	2040
Turning radius	W_s (mm)	1260/1253	1280
Lift speed,laden/unladen	mm/time	20/22	16/18
Lowering speed,laden/unladen	mm/s	Manual control	Manual control
Service weight	kg	250/322	270

Manual Stacker with Straddle Legs



Model:
SDJAS500
SDJAS1000

- Straddle legs width reach 1300mm(500kg)and1250mm(1000kgs).
- Lifting Height from 1500-1600mm.
- With adjustable forged forks.
- High quality steel mast ensures rigidity and durability.
- High efficient pumps makes the control easier to operate.
- Foot and hand controlled lifting function allows the operator to work without having to perform extreme body movements.
- Metal grid protects user from lift chains.
- With safety wheel guard and brake system to ensure safety during operation.

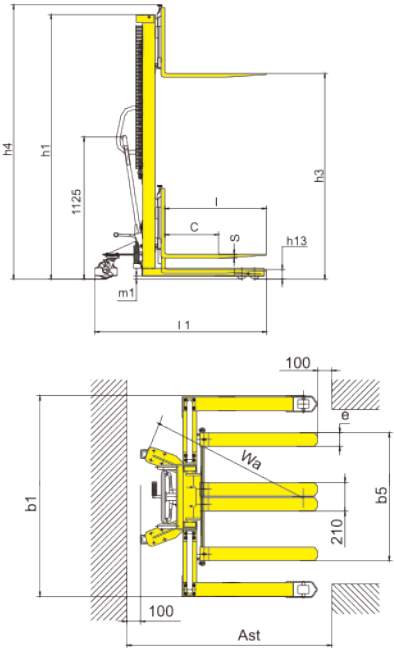

SDJAS series with Straddle legs and adjustable forks

1KG=2.205LB 1INCH=25.40MM

Model		SDJAS500	SDJAS1000
Load capacity/rated load	Q(kg)	500	1000
Load centre distance	c(mm)	500	500
Fork height, lowered	h_{10} (mm)	70	70
Height, mast lowered	h_1 (mm)	1990	2070
Max. lift height	h_2 (mm)	1600	1600
Height, mast extended	h_3 (mm)	1990	2105
Overall length	l_1 (mm)	1350/1610	1350/1610
Overall width	b_1 (mm)	1525	1475
Fork dimensions	s/e/l(mm)	48/100/800(1060)	30/100/800(1060)
Width overall forks	b_2 (mm)	200~745	200~950
Round clearance, laden,below mast	m_1 (mm)	30	30
Aisle width for pallets 1000x1200 crossways	A_c (mm)	2065(2315)	2072(2322)
Aisle width for pallets 800x1200 lengthways	A_s (mm)	- (2315)	- (2322)
Turning radius	W_s (mm)	1220(1470)	1235(1485)
Lift speed,laden/unladen	mm/time	23/25	20/22
Lowering speed,laden/unladen	mm/s	Manual control	Manual control
Service weight	kg	223	294