

Tow Tractor




Model:
QDD25W

Special for textile factory



Optional platform

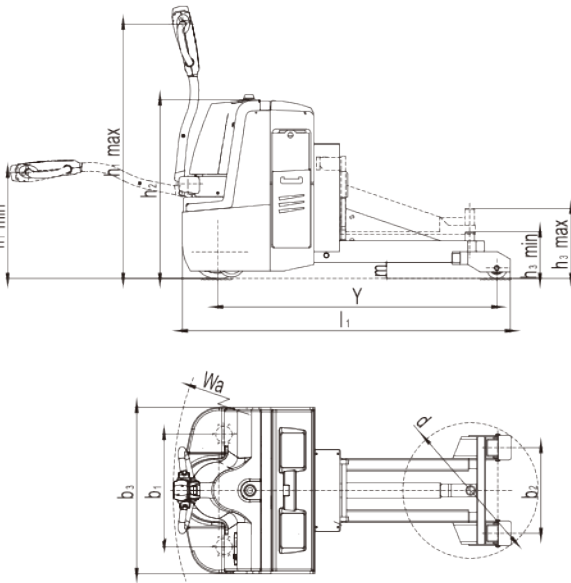

		1KG=2.205LB	1INCH=25.40MM
General Information	1.2	Manufacturer's type designation	QDD25W
	1.3	Drive: electric, diesel, petrol, fuel gas	Electric
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker	Pedestrian
	1.5	Rated capacity/rated load	Q (kg) 2500
	1.7	Rated drawbar pull	F (N) 750
Weight	1.9	Wheelbase	y (mm) 1303
	2.1	Service weight	kg 580
	2.3	Axle loading, unladen front/rear	kg 445/135
Tyres	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	Polyurethane
	3.2	Tyre size, front	250x70
	3.3	Tyre size, rear	98x82
	3.5	Wheels, number front/rear (x = driven wheels)	1x+2/2
	3.6	Tread, front	b10 (mm) 524
	3.7	Tread, rear	b11 (mm) 400
	4.9	Height drawbar in driving position min./max.	h14 (mm) 530/1230
Dimensions	4.19	Overall length	l1 (mm) 1532
	4.21	Overall width	b1/b2 (mm) 775
	4.32	Ground clearance, centre of wheelbase	m2 (mm) 75
	4.35	Turning radius	Wa (mm) 1515
	5.1	Travel speed, laden/unladen	km/h 4.5/5.0
Performance Data	5.7	Gradeability, laden/unladen	% 5/12
	5.10	Service brake	Electromagnetic
Motors	6.1	Drive motor rating S2 60 min	kW 1.2
	6.4	Battery voltage/nominal capacity K5	(V)/(Ah) or kWh 24/165 (210)
	6.5	Battery weight	kg 175
Additional Data	10.7	Sound pressure level at the driver's seat	dB (A) 70

Hand Pallet Truck

